

## ANTI-TACK ZG

**Compositions:** ANTITACK ZG is Zinc stearate dispersion in the stable paste with high solid content, formulate for dilute with water to reduce the dust pollution. As the anti-sticking agent, these paste can be applied in low concentration by dipping, brushing in ratio 1: 5 with water. In the final process of rubber sheet, you can pass it though the bath of **ANTITACK ZG** and let it dry.


### TYPICAL PROPERTIES

Appearance	White paste
Specific Gravity (25 °C) g/cc.	0.85
Viscosity @ 25 °C spindle #2 /60rpm.	5,000-10,000 Cps.
Active substance	40 %
Solubility	Dispersible in water

### APPLICATIONS

- Applied to the surface of uncured rubber that allows for release or separation after storage.

### INSTRUCTIONS FOR USE

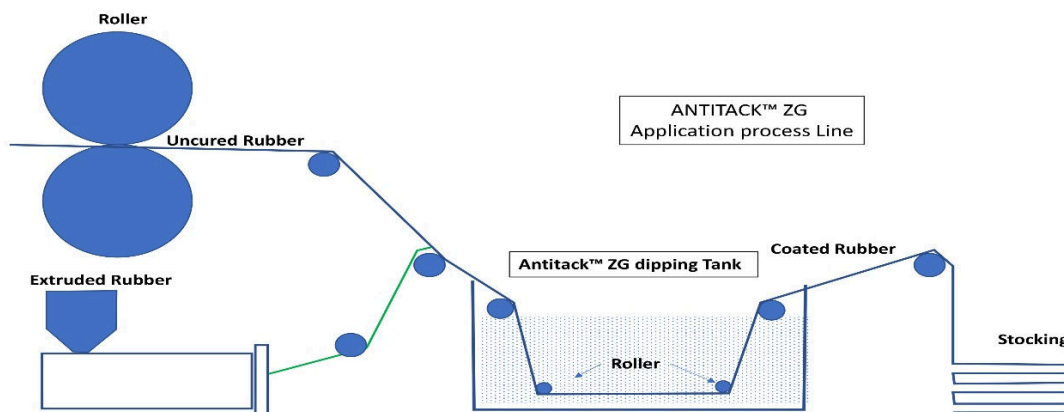

### HANDLING AND STORAGE

**ANTITACK ZG** should be stored in cool, dry place away from heat and flammable or combustible materials. In the case of skin contact, wash thoroughly. For eyes, flush with plenty of water for the at least 15 minutes. This product has a good storage stability, but avoid extremes of temperature and humidity. In the case of fire see MSDS.

The information contained in this pamphlet is the result of careful tests carried out objectively, its purpose is to help our customers but not imply any commitment on our part. However, all recommendations and suggestion are made without guarantee, since the conditions of used are beyond our control.